

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 0 430 482 B1**

(12)

**EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
**03.04.1996 Bulletin 1996/14**

(51) Int Cl.<sup>6</sup>: **G06F 11/20**, G11B 20/18,  
G11B 27/28

(21) Application number: **90312343.8**

(22) Date of filing: **13.11.1990**

**(54) Technique for information protection on fault-tolerant redundant information storage devices**

Technik zum Informationsschutz für fehlertolerante redundante Informationsspeichereinrichtungen

Technique de protection de l'information sur dispositif de stockage d'information redondant tolérant les fautes

(84) Designated Contracting States:  
**DE GB IT NL**

(30) Priority: **22.11.1989 US 440631**

(43) Date of publication of application:  
**05.06.1991 Bulletin 1991/23**

(73) Proprietor: **AT&T Corp.**  
**New York, NY 10013-2412 (US)**

(72) Inventor: **Walden, John S.**  
**Green Brook, New Jersey 08812 (US)**

(74) Representative:  
**Watts, Christopher Malcolm Kelway, Dr. et al**  
**AT&T (UK) LTD.**  
**AT&T Intellectual Property Division**  
**5 Mornington Road**  
**Woodford Green Essex IG8 OTU (GB)**

(56) References cited:  
**EP-A- 0 241 014** **EP-A- 0 303 856**  
**US-A- 4 169 288**

**EP 0 430 482 B1**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

### Technical Field

The present invention relates to a technique for the protection of information on one or more fault-tolerant redundant information storage devices that permits detection of which information is correct after associated one or more redundant device controllers write information into non-relative storage locations of the redundant storage device(s).

### Description of the Prior Art

Fault-tolerant disk systems use redundancy, or duplication, of data storage on mirrored disks to protect loss of data in case of equipment failure. Examples of such system are disclosed in the articles by G. Hendrie in Electronics, Vol. 56, No. 2, January 27, 1983, at pages 103-105; and J. Kavanagh in Management Review, (GB), September 1984 at pages 22-23. In the Hendrie article, a digital data recording and playback apparatus is disclosed which includes two data transmission channels for recording in duplicate a stream of data bits on separate tracks of a magnetic tape, each recorded bit stream being potentially influenced by a pattern of statistically distributed recording surface defects. During playback, error detection and correction circuitry for each channel provides an alarm signal synchronized with each uncorrected error condition in the corresponding stream of playback bits. A control circuit, responsive to the alarm signals from each channel, serves to interleave error-free bits from one channel to the exclusion of error bits from the other channel, to provide a single continuous stream of relatively error free bits corresponding to the recorded signal. In the Kavanagh article, a tandem computer system is discussed which comprises two or more processors connected together by a duplicate link so that the processors can share workloads and peripherals and back each other up to produce a fault-tolerant computer system.

Such duplication, however, only protects against the destruction of data when one of the redundant disk systems fail, but does not protect the data when the redundant disk controllers write the data into different sections of the mirrored disks because of a problem with one of the disk controllers. With such error, it is almost impossible to tell which disk is correct without searching both disks in a time consuming operation.

The problem remaining in the prior art is to provide a technique which:

(1) will detect that information stored in a storage location is not the same as that information stored in a redundant storage location; and (2) can then easily determine which of the redundant storage locations contains the correct data.

## Summary of the Invention

A method and system according to the invention are set out in claims 1 and 3 respectively. The invention relates to a technique for information protection on one or more fault-tolerant information storage devices, and for detecting which of the redundant stored information in related storage locations of the information storage device(s) is correct in a fast and simple manner when the information in both redundant storage locations is not the same. More particularly, as each section of information to be stored is received, a separate monotonically increasing number is added to each section of information just prior to that information being stored in the redundant storage locations. Therefore, when the information does not match during the subsequent accessing of the redundant storage locations on the redundant storage device(s), an error is determined to have occurred in the redundant storage location including the lower monotonically increasing number, since such information had to be stored prior in time to the information stored with the higher monotonically increasing number, and the correct information is in the redundant storage location containing the higher monotonically increasing number.

### Brief Description of the Drawing

FIG. 1 is a block diagram of an exemplary processing section of an exemplary computer system for practicing the present invention;

FIG. 2 is a diagram of an exemplary format of information to be stored in the mirrored disks of FIG. 1; FIG. 3 is an illustration of predetermined storage locations on disks A and B of FIG. 1; and

Fig. 4 is an illustration of the predetermined storage locations of FIG. 2 after predetermined information has been stored therein and how a correct information entry can be determined.

### Detailed Description

The following description of the preferred embodiment is directed to storage of data on redundant computer disk units. However, it is to be understood that such description is not for limitation purposes and that the present invention can be applied to the storage of any form of information on redundant media or one or more storage devices, where a same storage device can be used to store the same information in two or more redundant locations thereon.

FIG. 1 is a block diagram of a pertinent portion of an exemplary processing section of a computing system which includes a Central Processing Unit (CPU) 10 comprising a processor 11, a Read Only Memory (ROM) 12 for storing the main program for processor 11, and a Random Access Memory (RAM) 13 which includes a scratchpad memory. Processor 11 is shown as including a Register 14, shown by dashed lines, which will be used

for exemplary purposes in hereinafter describing the present inventive fault tolerant technique. While only one CPU is shown, it is to be understood that CPU 10 can be duplicated and run in synchronism with the other CPU as is well known in the art for ensuring that an equipment failure in a CPU will not disable the entire computer system. However, for purposes of simplicity, the following description will be based on an exemplary computer system that has only one CPU 10. CPU 10 is shown as being connected to peripheral units by a bus 15, of which only a first disk controller 20, and a second disk controller 21 are shown. Disk controllers 20 and 21 are redundant controllers that operate in concert with each other to normally coordinate the write or read of data to or from a same relative storage location or sector on a first disk 22 and a second disk 23, respectively, as is well known in the art. It is to be understood that when a single storage device or disk is used for fault-tolerant information protection, the information would be stored in sequence in two "relative" or redundant storage locations on the same storage device or disk. Additionally, it is to be understood that with mirrored disks the redundant storage locations on the disk can be: (1) the exact same storage location when perfectly mirrored; or (2) different, but "relative" or offset, storage locations on the disks. As is also known in the art, when one of the redundant disk controllers 20 or 21 become disabled, the other disk controller can simultaneously or sequentially write data onto the first and second disks 22 and 23 to maintain the mirrored data, or just read from one or both of the disks, until the disabled controller is repaired.

The term "mirrored disks" indicates that each of disks 22 and 23 normally stores the same data in the same relative storage location or sector of each disk for redundancy purposes. Fault-tolerant disk systems use redundancy of data storage to protect data in case of equipment failure. In addition, most fault-tolerant equipment vendors store the address, identifier, or number, of the sector in which the data is to be stored along with the actual data to be stored in that sector as a redundancy check, but this does not cover all possibilities for detecting errors of storage as will be shown in the following description. It will be assumed hereinafter that (a) the data address, or sector number, and (b) the actual data to be stored are encoded with a circular redundancy code, or any suitable error correcting code, before being sent by processor 11 over bus 15 to controllers 20 and 21. To enable the swift and easy detection of faulty data in a corresponding sector of one of disks 22 or 23, a monotonically increasing number is added to the sector address and data information before such sector address and data information is simultaneously or sequentially stored in mirrored disks 22 and 23 via controllers 20 and 21. A monotonically increasing number is defined herein as a sequence of numbers such that the  $n+1$ th number is always greater than the  $n$ th number. For example, the cardinal numbers 1,2,3, etc., can be denoted as a time and date number as, for example, November 15, 1989,

at 2:00.00 p.m. which can be written as 8911151400.00 and used as a monotonically increasing number, where the next monotonically increasing number in the sequence might be 8911151400.01 for the next second of time and used if information is to be stored during that second in time. Such monotonically increasing number may be added, for example, by processor 11 before transmitting the sector number and data over bus 15 to controllers 20 and 21. Processor 11 can, for example, obtain such monotonically increasing number from a register 14 which is incremented with every data transmission being sent to controllers 20 and 21 for simultaneous storage in mirrored disks 22 and 23 or by any other suitable means.

FIG. 2 illustrates an exemplary arrangement of a packet of data that is stored in duplicate by controllers 20 and 21 on mirrored disks 22 and 23. The format used for such packet of data includes a disk sector number section 30 including a predetermined number of K bits indicating the sector address or relative storage location identifier in which the data is to be stored; a section 31 comprising a predetermined number of L bits for use indicating the monotonically increasing number; and a section 32 comprising a predetermined number of M bits for sending the actual data bits. It is to be understood that the format shown is only for purposes of explanation and not for purposes of limitation in that any other suitable arrangement of such sections would fall within the spirit and scope of the present invention. However, the format shown in FIG. 2 will be assumed for the transmission and storage of data in the discussion which follows.

FIG. 3 illustrates five exemplary disk sectors, numbered 1-5, on each of disks 22 and 23 which are originally assumed empty. In a first illustrative step, data designated D1 is generated or obtained from a peripheral device by processor 11 for storage in mirrored disks 22 and 23. Processor 11 determines that data D1 is to be stored in sector 2; adds the sector number "2" in section 30 of the packet; obtains and adds the next monotonically increasing number, here determined as number 100, in section 31 of the packet; adds data D1 into section 32 of the data packet; and then transmits the packet over bus 15 to controllers 20 and 21. Controllers 20 and 21 receive this packet, use the sector address from section 30 of the data packet to access sector 2 in each of mirrored disks 22 and 23, and store the data packet therein. As shown in FIG. 3, at the conclusion of this step, when no error has taken place, sector 2 of each of disks 22 and 23 is found to store the sector number (2), the monotonically increasing number (100) and the data (D1) found in the received data packet. For an exemplary next step, it will be assumed that processor 11 receives second data D2 that it determines should be stored in sector 3 of mirrored disks 22 and 23. Therefore, processor 11 adds the sector number 3 in section 30 of the data packet; the next monotonically increasing number 101 in section 31 of the data packet; the data D2 in section 32 of the data packet; and transmits such data-packet to controllers 20 and 21

via bus 15. With no writing error, controllers 20 and 21 will write such data packet information into sector 3 of each of mirrored disks 22 and 23, as shown in FIG. 3.

FIG. 4 illustrates the case of a writing error by one of controllers 20 and 21 at a period of time after the above two steps, shown in FIG. 3, have been completed. For example, it will be assumed that processor 11 receives or generates data designated D3 that it determines should be stored in sector 3 of mirrored disks 22 and 23. Therefore, processor 11 forms the data packet with the designated sector number (3) placed in section 30 of the packet; the next monotonically increasing number, e.g., 113, placed in section 31 of the data packet; the data D3 in section 32 of the data packet; and transmits such data packet to controllers 20 and 21 via bus 15. It is now assumed that controller 20 correctly stores this data packet in sector 3 of disk 22, thereby overwriting the previously stored D2 data packet, while controller 21 erroneously write this data packet into sector 2 of disk 23, thereby overwriting the previously stored D1 data packet.

When processor 11 thereafter determines that the data in sector 2 is to be read, it sends a "read" instruction to controllers 20 and 21 which access sector 2 on mirrored disks 22 and 23, respectively, and initially, for example, compare the data sections 32 to find that the D1 and D3 data do not match and determine that an error has occurred. Had no error in the data matching occurred, one of the controllers 20 and 21 would have then sent the data to processor 11. However, once such error has been found, controllers 20 and 21 would then compare the sector address stored in sector 2 of disks 22 and 23. In accordance with the example shown in FIG. 4, controller 20 would determine that the sector address in sector 2 of disk 22 is correct, and controller 21 would find that the sector address in sector 2 of disk 23 was incorrect, thereby indicating that the data packet stored in sector 2 of disk 22 was the correct data. In practice, having made such determination of an error in sector 2 of disk 23, either controller 20 or 21 could overwrite sector 2 of disk 23 with the packet of data presently stored in sector 2 of disk 22 so that both disks now match in sector 2 or some other appropriate error-recovery procedure.

When processor 11 thereafter determines that the data in sector 3 is to be read, controllers 20 and 21 receive the "read" instruction from processor 11 and access sector 3 on mirrored disks 22 and 23, respectively. When controllers 20 and 21 first compare the data sections 32 in both stored data packets, they will find that the D3 and D2 data do not match. Controllers 20 and 21 then compare the sector address stored in packet section 30 in sector 3 of both disks 22 and 23 and find that they match. In accordance with the prior art, this is as far as the error detection could proceed since, at most, only the sector address in section 30 and the data in section 32 were stored. Therefore, with prior art systems it would be impossible to tell which of the mirrored disks 22 and 23 carried the correct data in sector 3 without performing

an interrupt of the computer system and doing a search of both disks 22 and 23 in a time consuming operation. However, in accordance with the present invention, controllers 20 and 21 can easily determine which of the two data packets stored in sector 3 of disks 22 and 23 is the correct data by next comparing the monotonically increasing number stored in section 31 of the data packet in sector 3 of disks 22 and 23. When performing this function, it can be seen from FIG. 4 that the data packet in sector 3 of disk 22 has the correct data, since its monotonically increasing number is 113 while the monotonically increasing number stored in sector 3 of disk 23 is only 101, where the higher number indicates a most recent writing of a data packet into a disk sector while the lower number concurrently indicates that the data packet contains old and unwanted data. It is to be understood that the function of controllers 20 and 21 performing the comparisons is for purposes of illustration and not for purposes of limitation, and that such comparisons could be performed by any device or medium within the system as, for example, processors 11 and still be within the scope of the present invention.

In conclusion, a preferred sequence for reading data from corresponding sectors of mirrored disks would be to first compare the data in section 32 of the corresponding sectors to see if the data in those sectors matched, and to send the data to processor 11 if the data matched. If the data in the corresponding sectors did not match, then the stored sector address numbers in section 30 of the stored data packets would be compared, and if they did not match, then the data in the packet with the correct sector address number would be sent to processor 11. However, if the sector addresses matched, then the monotonically increasing number stored in section 31 of the stored data packets would be compared and the data packet with the higher number would be sent to processor 11 since this is the most recent data to be stored in that sector. It is to be understood that these steps could be performed in a different sequence and still provide the ultimate result described above, and thereby still fall within the scope of the present invention.

## Claims

1. A method of operating at least first and second fault tolerant redundant information storage devices, where each information packet stored on the redundant information storage devices includes a first section comprising a storage location identifier on an information storage device where the information packet is to be stored, a second section comprising information to be stored in the storage location identifier indicated in the first section, and a third section including a number which is a separate monotonically increasing number that is applied to each sequential packet that is stored on the redundant information storage devices and the method

includes reading information comprising the steps of:

- (a) comparing the information in the second section of each stored information packet and transmitting the information from one of the compared information packets to a requesting end user device when the information comparison determines that the information in the relative storage locations match, 5
- (b) comparing the storage location identifiers in each first section of the stored information packet in each of the accessed storage locations of the redundant information storage devices when the information in the compared storage locations in step (a) does not match, and transmitting the information from the compared information packets including a correct storage location identifier to the requesting end user device when the compared storage location identifiers do not match; and 10
- (c) comparing the number stored in the third section of the information packets compared in steps (a) and (b) when both the information comparison in step (a) is found not to match, and the storage location identifiers in step (b) are found to match, and transmitting the information from the information packet found to have the highest number in the third section of the compared information packets. 15 20 25 30

2. A method as claimed in claim 1 including storing information comprising the steps of:

- (d) transmitting information packets in sequence to at least first and second redundant storage device controllers for the concurrent storage of each packet in a predetermined corresponding storage location of the at least first and second redundant information storage devices, each sequential information packet comprising (i) a storage location identifier disposed in a first section of the information packet indicating the destined storage location on the at least first and second redundant information storage devices for the information packet, (ii) information disposed in a second section of the information packet for storage in the storage location designated in the first section, and (iii) a unique number disposed in a third section of the information packet which is a separate monotonically increasing number provided to each sequential packet that is transmitted to the storage device controllers; and 35 40 45 50
- (e) the redundant storage device controllers using the storage location identifier in the first section of each received information packet for accessing a storage location in each of the 55

redundant information storage devices, and storing the information packet, including the first, second, and third sections, in the accessed storage locations of the redundant information storage devices.

3. A fault-tolerant system comprising:

at least first and second redundant information storage devices, each device including a plurality of storage locations for storing separate packets of information; and  
at least first and second information device controllers arranged to perform corresponding operations,  
each information device controller comprising, means for accessing a separate one of the at least first and second redundant information storage devices when none of the storage devices or controllers are disabled, for writing an information packet into a predetermined storage location of the accessed storage device, each information packet including (i) a first section comprising a storage location identifier corresponding to the storage location on the redundant information storage device where the information packet is to be stored, (ii) a second section comprising the information to be stored in the storage location indicated by the first section, and (iii) a third section comprising a number which is a separate monotonically increasing number that is applied to each sequential packet being stored on the one or more redundant information storage devices, wherein each of the accessing means is also arranged for reading an information packet from a predetermined storage location of the accessed storage device; and  
comparison means, responsive to the accessing means reading an information packet from a predetermined storage location on the associated storage device, for (i) comparing the information stored in the second section of the accessed information packet with information stored in the second section of accessed information packets of corresponding storage locations of the other storage devices, for determining if the information from the corresponding accessed storage locations match, and transmitting such information to a requesting end user device when the information is found to match to end the packet reading step, (ii) comparing the storage location identifier in the first section of the accessed information packet with the storage location identifier in the first section of accessed information packets from corresponding storage locations of the other accessed ones of the storage devices, when the

accessing means has determined that the information from accessed corresponding storage locations of the accessed storage devices does not match, and transmitting the information stored in the information packet including the correct storage location identifier to the end user device when the compared storage location identifiers do not match to end the packet reading step, and (iii) comparing the number in the third section of the accessed information packet with the number in the third section of each of the corresponding storage locations in the other accessed storage locations when (a) an information match has not been found and (b) the storage location identifiers have been found to match, for transmitting the information from the compared information packet including the highest number in the third section to the end user device to conclude the packet reading step.

## Patentansprüche

1. Verfahren zum Betreiben mindestens erster und zweiter fehlertoleranter redundanter Informationsspeichervorrichtungen, wobei

jedes in den redundanten Informationspeichervorrichtungen gespeicherte Informationspaket einen ersten Teil mit einer Speicherstellenkennung in einer Informationsspeichervorrichtung, wo das Informationspaket zu speichern ist, einen zweiten Teil mit in der im ersten Teil angezeigten Speicherstellenkennung zu speichernden Informationen und einen dritten Teil mit einer Nummer, die eine getrennte monoton steigende Nummer ist, die an jedes sequentielle Paket angelegt wird, das in den redundanten Informationsspeichervorrichtungen gespeichert wird, enthält, und das Verfahren das Lesen von Informationen mit folgenden Schritten umfaßt:

(a) Vergleichen der Informationen im zweiten Teil jedes gespeicherten Informationspakets und Übertragen der Informationen aus einem der verglichenen Informationspakete zu einer anfordernden Endbenutzervorrichtung, wenn durch den Informationsvergleich bestimmt wird, daß die Informationen an den relativen Speicherstellen übereinstimmen,

(b) Vergleichen der Speicherstellenkennungen in jedem ersten Teil des gespeicherten Informationspakets an jeder der erreichten Speicherstellen der redundanten Informationsspeichervorrichtungen, wenn die Informationen an den verglichenen Speicherstellen im Schritt (a) nicht übereinstimmen, und Übertragen der Informationen aus den verglichenen Informationspaketen

ten einschließlich einer richtigen Speicherstellenkennung zur anfordernden Endbenutzervorrichtung, wenn die verglichenen Speicherstellenkennungen nicht übereinstimmen; und

(c) Vergleichen der im dritten Teil der in Schritten (a) und (b) verglichenen Informationspakete gespeicherten Nummer, wenn sich sowohl herausstellt, daß der Informationsvergleich im Schritt (a) keine Übereinstimmung ergibt, als auch herausstellt, daß die Speicherstellenkennungen im Schritt (b) übereinstimmen, und Übertragen der Informationen aus dem Informationspaket, von dem sich herausgestellt hat, daß es die höchste Nummer im dritten Teil der verglichenen Informationspakete aufweist.

2. Verfahren nach Anspruch 1 einschließlich der Speicherung von Informationen, mit folgenden Schritten:

(d) Übertragen von Informationspaketen der Reihe nach zu mindestens ersten und zweiten redundanten Speichervorrichtungssteuerungen für die gleichzeitige Speicherung jedes Pakets an einer vorbestimmten entsprechenden Speicherstelle der mindestens ersten und zweiten redundanten Informationsspeichervorrichtungen, wobei jedes sequentielle Informationspakets (i) eine in einem ersten Teil des Informationspakets angeordnete Speicherstellenkennung, die die Zielspeicherstelle in den mindestens ersten und zweiten redundanten Informationsspeichervorrichtungen für das Informationspaket anzeigt, (ii) in einem zweiten Teil des Informationspakets angeordnete Informationen zur Speicherung an der im ersten Teil bezeichneten Speicherstelle, und (iii) eine in einem dritten Teil des Informationspakets angeordnete einmalige Nummer, die eine getrennte monoton steigende Nummer ist umfaßt, die für jedes sequentielle Paket bereitgestellt wird, das zu den Speichervorrichtungssteuerungen übertragen wird umfaßt; und

(e) Benutzen der Speicherstellenkennung im ersten Teil jedes empfangenen Informationspakets durch die redundanten Speichervorrichtungssteuerungen zum Zugreifen auf eine Speicherstelle in jeder der redundanten Informationsspeichervorrichtungen, und Speichern des Informationspakets einschließlich der ersten, zweiten und dritten Teile an den erreichten Speicherstellen der redundanten Informationsspeichervorrichtungen.

3. Fehlertolerantes System mit folgenden:

mindestens ersten und zweiten redundanten Informationsspeichervorrichtungen, die jeweils eine Mehrzahl von Speicherstellen zur Speiche-

nung getrennter Informationspakete enthalten;  
und

mindestens ersten und zweiten Informations-  
vorrichtungssteuerungen zur Durchführung  
entsprechender Operationen, wobei jede Infor-  
mationsvorrichtungssteuerung folgendes  
umfaßt:

Mittel zum Zugreifen auf eine getrennte der min-  
destens ersten und zweiten redundanten Infor-  
mations-speichervorrichtungen, wenn keine  
der Speichervorrichtungen oder Steuerungen  
gesperrt sind, zum Einschreiben eines Informa-  
tionspakets in eine vorbestimmte Speicherstel-  
le der erreichten Speichervorrichtung, wobei  
jedes Informationspaket (i) einen ersten Teil mit  
einer Speicherstellenkennung, die der Spei-  
cherstelle in der redundanten Informati-  
ons-speichervorrichtung entspricht, wo das  
Informationspaket zu speichern ist, (ii) einen  
zweiten Teil mit den an der vom ersten Teil  
angezeigten Speicherstelle zu speichernden  
Informationen, und (iii) einen dritten Teil mit  
einer Nummer, die eine getrennte monoton stei-  
gende Nummer ist, die an jedes in der einen  
oder in mehreren redundanten Informations-  
speichervorrichtungen gespeicherte sequenti-  
elle Paket angelegt wird, umfaßt, wobei jedes  
der Zugriffsmittel auch zum Auslesen eines  
Informationspakets aus einer vorbestimmten  
Speicherstelle der erreichten Speichervorrich-  
tung angeordnet ist; und

auf die Zugriffsmittel, die ein Informationspaket  
aus einer vorbestimmten Speicherstelle in der  
zugehörigen Speichervorrichtung auslesen,  
reagierende Vergleichsmittel zum (i) Verglei-  
chen der im zweiten Teil des erreichten Informa-  
tionspakets gespeicherten Informationen mit im  
zweiten Teil von erreichten Informationspake-  
ten an entsprechenden Speicherstellen der  
anderen Speichervorrichtungen gespeicherten  
Informationen zum Bestimmen, ob die Informa-  
tionen von den entsprechenden erreichten  
Speicherstellen übereinstimmen, und zum  
Übertragen dieser Informationen zu einer anfor-  
dernden Endbenutzervorrichtung, wenn sich  
herausstellt, daß die Informationen überein-  
stimmen, den Paketleseschritt zu beenden, (ii)  
Vergleichen der Speicherstellenkennung im  
ersten Teil des erreichten Informationspakets  
mit der Speicherstellenkennung im ersten Teil  
erreichter Informationspakete aus entspre-  
chenden Speicherstellen der anderen erreich-  
ten der Speichervorrichtungen, wenn die  
Zugriffsmittel bestimmt haben, daß die Informa-  
tionen aus erreichten entsprechenden Spei-  
cherstellen der erreichten Speichervorrich-  
tungen nicht übereinstimmen, und Übertragen der  
im Informationspaket gespeicherten Informatio-

nen einschließlich der richtigen Speicherstel-  
lenkennung zur Endbenutzervorrichtung, wenn  
die verglichenen Speicherstellenkennungen  
nicht übereinstimmen, um den Paketleseschritt  
zu beenden, und (iii) Vergleichen der Nummer  
im dritten Teil des erreichten Informationspa-  
kets mit der Nummer im dritten Teil jeder der  
entsprechenden Speicherstellen an den ande-  
ren erreichten Speicherstellen, wenn (a) keine  
Informationsübereinstimmung gefunden wor-  
den ist und (b) sich herausgestellt hat, daß die  
Speicherstellenkennungen übereinstimmen,  
zum Übertragen der Informationen aus dem  
vergebenen Informationspaket einschließlich  
der höchsten Nummer im dritten Teil zur End-  
benutzervorrichtung, um den Paketleseschritt  
zu beenden.

## Revendications

1. Un procédé pour faire fonctionner au moins des pre-  
mier et second dispositifs d'enregistrement d'infor-  
mation redondants et tolérant des défauts, dans  
lequel

chaque paquet d'information qui est enregistré  
dans les dispositifs d'enregistrement d'information  
redondants comprend une première section consis-  
tant en un identificateur de position d'enregistre-  
ment sur un dispositif d'enregistrement d'informa-  
tion dans lequel le paquet d'information doit être  
enregistré, une seconde section consistant en une  
information à enregistrer dans l'identificateur de  
position d'enregistrement qui est indiqué dans la  
première section, et une troisième section compre-  
nant un nombre qui est un nombre séparé, augmen-  
tant de façon monotone, qui est appliqué à chaque  
paquet séquentiel qui est enregistré dans les dispo-  
sitifs d'enregistrement d'information redondants, et  
le procédé comprend la lecture d'information, avec  
les étapes suivantes :

(a) on compare l'information dans la seconde  
section de chaque paquet d'information enre-  
gistré et on émet l'information à partir de l'un des  
paquets d'information comparés vers un dispo-  
sitif utilisateur final demandeur, lorsque la com-  
paraison d'information détermine que les infor-  
mations dans les positions d'enregistrement  
relatives concordent,

(b) on compare les identificateurs de position  
d'enregistrement dans chaque première sec-  
tion du paquet d'information enregistré dans  
chacune des positions d'enregistrement aux-  
quelles on accède dans les dispositifs d'enre-  
gistrement d'information redondants, lorsque  
l'information dans les positions d'enregistre-  
ment comparées à l'étape (a) ne concorde pas,

et on émet l'information à partir des paquets d'information comparés contenant un identificateur de position d'enregistrement correct, vers le dispositif utilisateur final demandeur, lorsque les identificateurs de position d'enregistrement comparés ne concordent pas; et

(c) on compare le nombre enregistré dans la troisième section des paquets d'information qui sont comparés aux étapes (a) et (b) lorsque, à la fois, la comparaison d'information à l'étape (a) indique l'absence de concordance, et les identificateurs de position d'enregistrement à l'étape (b) sont trouvés en concordance, et on émet l'information à partir du paquet d'information pour lequel on a trouvé le nombre le plus élevé dans la troisième section des paquets d'information qui sont comparés.

2. Un procédé selon la revendication 1, comprenant l'enregistrement d'information avec les étapes suivantes :

(d) on émet séquentiellement des paquets d'information vers au moins des première et seconde unités de commande de dispositifs d'enregistrement redondants, pour l'enregistrement simultané de chaque paquet dans une position d'enregistrement correspondante prédéterminée des premier et second dispositifs d'enregistrement d'information redondants, au moins, chaque paquet d'information séquentiel comprenant (i) un identificateur de position d'enregistrement placé dans une première section du paquet d'information, indiquant la position d'enregistrement de destination sur les premier et second dispositifs d'enregistrement d'information redondants, au moins, pour le paquet d'information, (ii) une information placée dans une section section du paquet d'information, destinée à être enregistrée dans la position d'enregistrement qui est désignée dans la première section, et (iii) un nombre particulier placé dans une troisième section du paquet d'information, qui est un nombre distinct, augmentant de façon monotone, qui est alloué à chaque paquet séquentiel qui est émis vers les unités de commande de dispositifs d'enregistrement; et

(e) les unités de commande de dispositifs d'enregistrement redondantes utilisant l'identificateur de position d'enregistrement dans la première section de chaque paquet d'information reçu pour accéder à une position d'enregistrement dans chacun des dispositifs d'enregistrement d'information redondants, et enregistrant le paquet d'information, comprenant les première, seconde et troisième sections, dans les positions d'enregistrement sur lesquelles porte

l'accès, des dispositifs d'enregistrement d'information redondants.

3. Un système tolérant des défauts, comprenant :

au moins des premier et second dispositifs d'enregistrement d'information redondants, chaque dispositif comprenant un ensemble de positions d'enregistrement pour enregistrer des paquets d'information séparés; et

au moins des première et seconde unités de commande de dispositif d'information conçues pour effectuer des opérations correspondantes, chaque unité de commande de dispositif d'information comprenant,

des moyens pour accéder à un dispositif séparé parmi les dits au moins premier et second dispositifs d'enregistrement d'information redondants lorsque aucun des dispositifs d'enregistrement ni aucune des unités de commande n'est invalidé, pour écrire un paquet d'information dans une position d'enregistrement prédéterminée du dispositif d'enregistrement sur lequel porte l'accès, chaque paquet d'information comprenant (i) une première section consistant en un identificateur de position d'enregistrement correspondant à la position d'enregistrement, sur le dispositif d'enregistrement d'information redondant, à laquelle le paquet d'information doit être enregistré, (ii) une section section constituée par l'information à enregistrer dans la position d'enregistrement qui est indiquée par la première section, et (iii) une troisième section consistant en un nombre qui est un nombre séparé, augmentant de façon monotone, qui est appliqué à chaque paquet séquentiel qui est enregistré dans le ou les dispositifs d'enregistrement d'information redondants, chacun des moyens d'accès étant également conçu pour lire un paquet d'information dans une position d'enregistrement prédéterminée du dispositif d'enregistrement sur lequel porte l'accès; et

des moyens de comparaison, réagissant à la lecture par les moyens d'accès d'un paquet d'information se trouvant à une position d'enregistrement prédéterminée sur le dispositif d'enregistrement associé, (i) en comparant l'information enregistrée dans la seconde section du paquet d'information qui fait l'objet d'une opération d'accès, avec une information enregistrée dans la seconde section de paquet d'information faisant l'objet d'une opération d'accès, dans des positions d'enregistrement correspondantes des autres dispositifs d'enregistrement, pour déterminer si l'information provenant des positions d'enregistrement correspondantes faisant l'objet d'opérations d'accès



concorde, et en émettant cette information vers un dispositif utilisateur final demandeur lorsque l'information est trouvée en concordance, pour mettre fin à l'étape de lecture de paquet, (ii) en comparant l'identificateur de position d'enregistrement dans la première section du paquet d'information faisant l'objet d'une opération d'accès, avec l'identificateur de position d'enregistrement dans la première section de paquets d'information faisant l'objet d'une opération d'accès, dans des positions d'enregistrement correspondantes des autres dispositifs d'enregistrement faisant l'objet d'opérations d'accès, lorsque les moyens d'accès ont déterminé que l'information provenant de positions d'enregistrement correspondantes faisant l'objet d'opérations d'accès, dans les dispositifs d'enregistrement faisant l'objet d'opération d'accès, ne concorde pas, et en émettant vers le dispositif utilisateur final l'information enregistrée dans le paquet d'information qui contient l'identificateur de position d'enregistrement correct, lorsque les identificateurs de position d'enregistrement qui sont comparés ne concordent pas, pour mettre fin à l'étape de lecture de paquet, et (iii) en comparant le nombre dans la troisième section du paquet d'information faisant l'objet d'une opération d'accès avec le nombre dans la troisième section de chacune des positions d'enregistrement correspondantes dans les autres positions d'enregistrement faisant l'objet d'opérations d'accès, lorsque (a) une concordance d'information n'a pas été trouvée, et (b) les identificateurs de position d'enregistrement ont été trouvés en concordance, pour émettre vers le dispositif utilisateur final l'information provenant du paquet d'information comparé qui contient le nombre le plus élevé dans la troisième section, pour mettre fin à l'étape de lecture de paquet.

40

45

50

55

FIG. 1

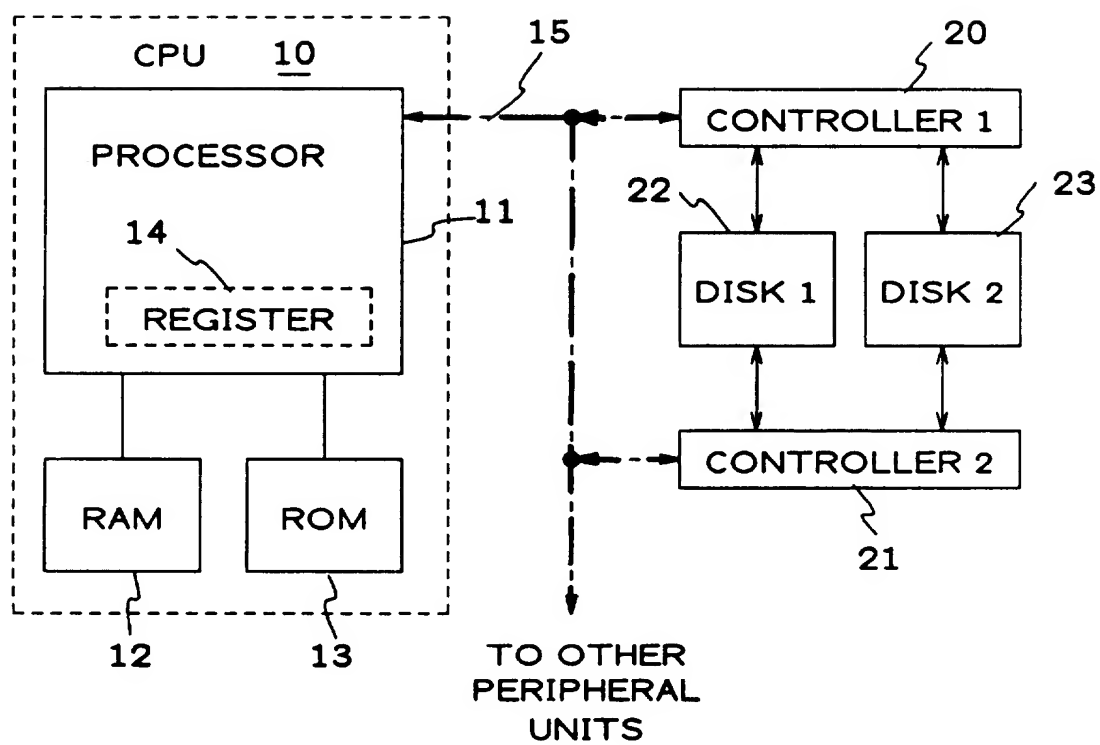


FIG.2

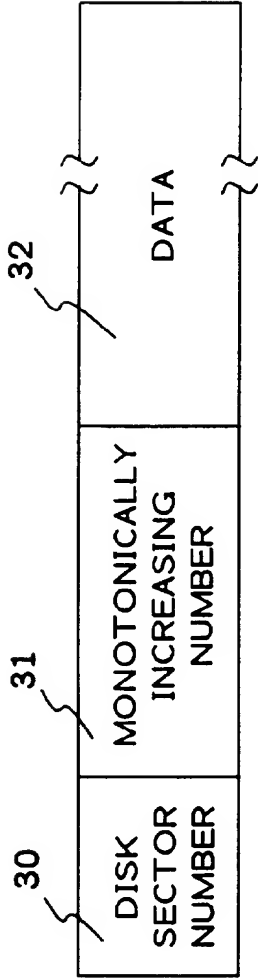


FIG.3

|                 |   |          |          |   |   |
|-----------------|---|----------|----------|---|---|
| DISK SECTOR NO. | 1 | 2        | 3        | 4 | 5 |
| DISK 22         |   | 2,100,D1 | 3,101,D2 |   |   |
| DISK 23         |   | 2,100,D1 | 3,101,D2 |   |   |

FIG.4

|                 |   |          |          |   |   |
|-----------------|---|----------|----------|---|---|
| DISK SECTOR NO. | 1 | 2        | 3        | 4 | 5 |
| DISK 22         |   | 2,100,D1 | 3,113,D3 |   |   |
| DISK 23         |   | 3,113,D3 | 3,101,D2 |   |   |